
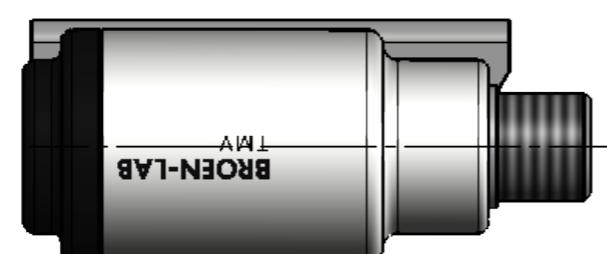
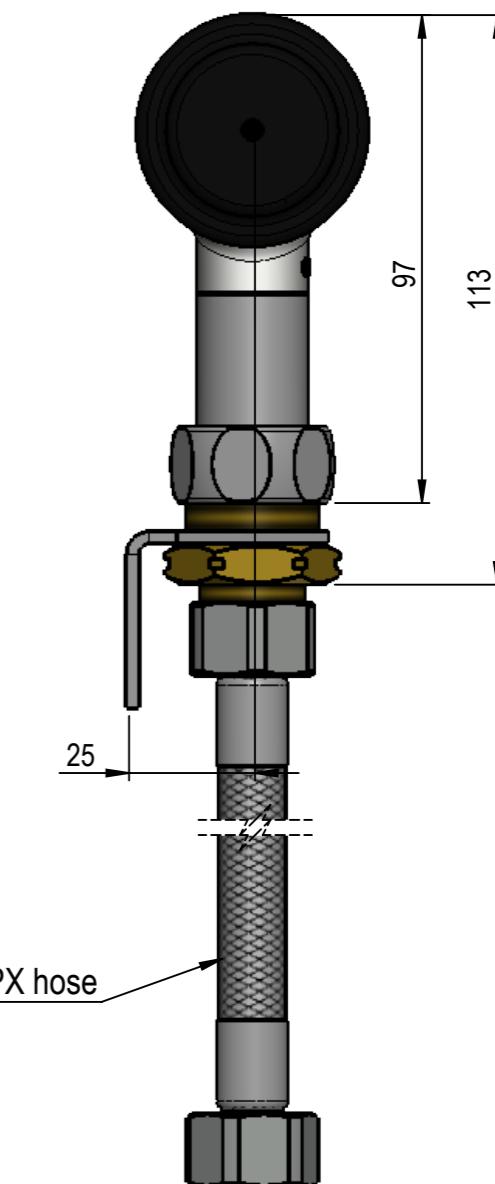


Area of Application:
Wall mounted
Hot and cold water
Min. Working pressure 1 Bar
Max. working pressure 10 bar

Temperature set at 38°C

Materials in media contact:
Brass
Chrome plated, Brass
Rubber, EPDM
Silicone based lubricant
POM
SPX (Soft PEX)

Inlet / Outlet connection:
DN8 hose with G $\frac{1}{2}$ Union nut (700mm)
ISO228/1 - G $\frac{1}{2}$ "

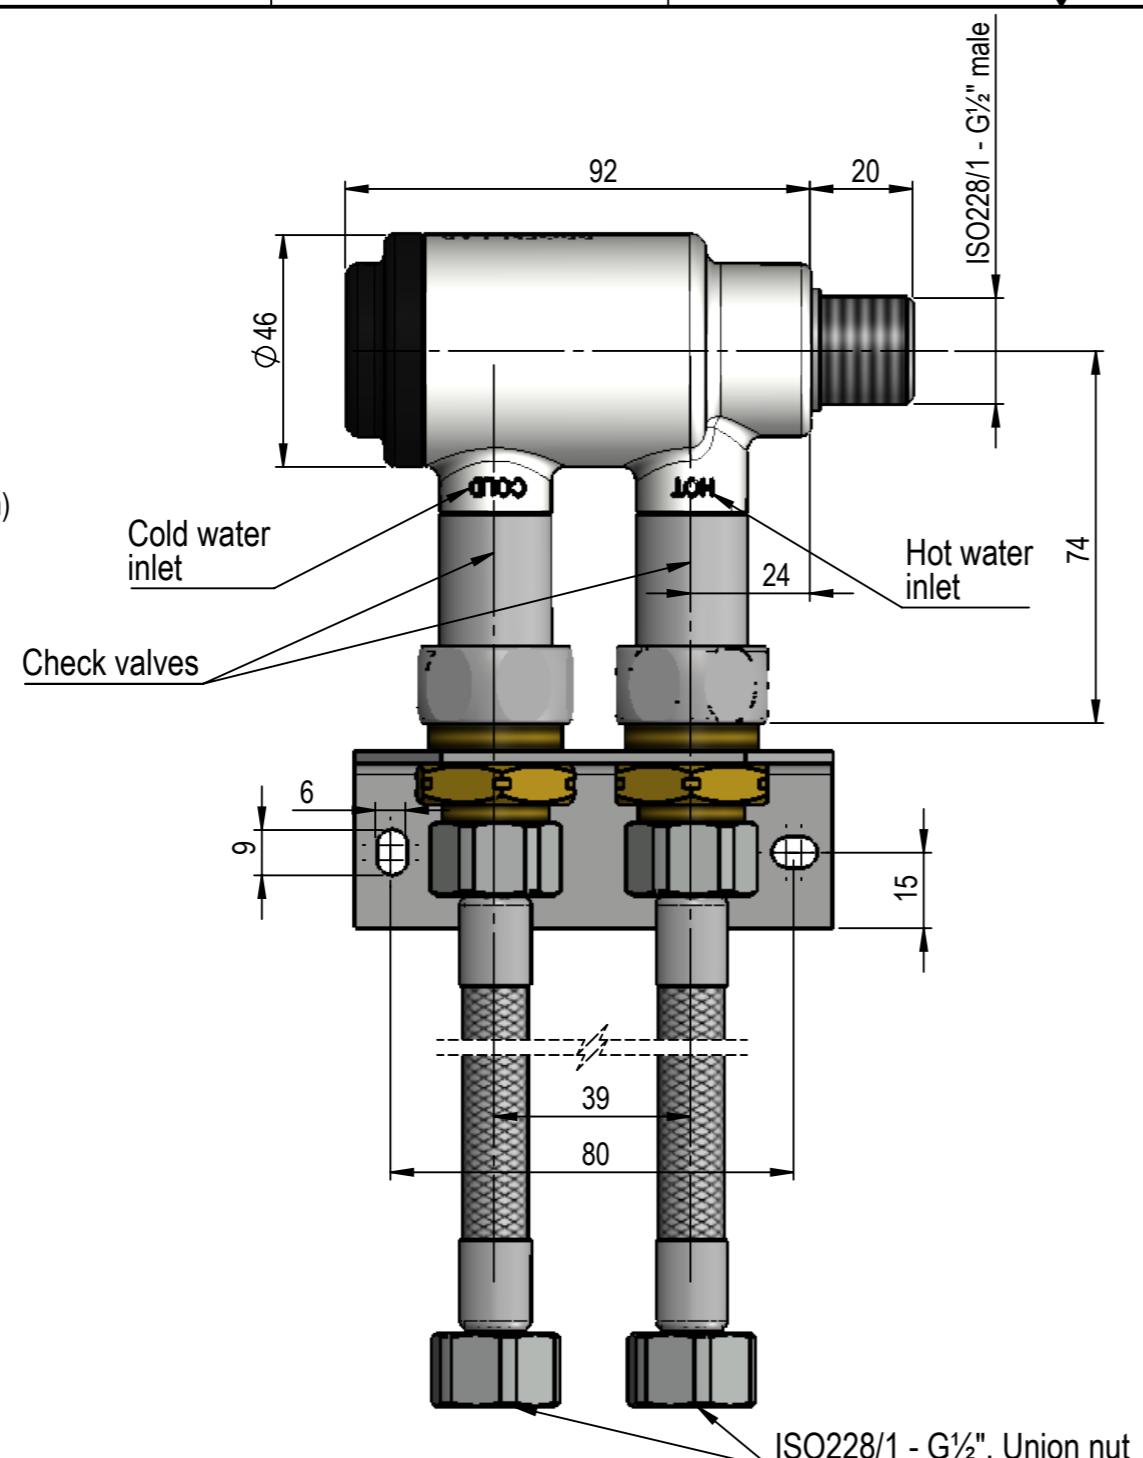

Description: , Wall mounted, ISO228/1 - G $\frac{1}{2}$ ", Thermostatic mixing valve, , ISO228/1 - thread male										Media: Hot and cold water			
Comments:										Drawing type: Customer drawing			
Drawing type: Customer drawing										Weight: 1.174 Kg			
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:				Designed by: NSC	Drawn by: VEF	Released on TM No. 9483	Date (DD-MM-YY): 20-02-23
This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.										Format: A3	Drawing No.: 26030071035E		

BROEN-LAB

Area of Application:

Table mounted

Water

Max. working pressure 10 bar

Temperature range 5°C-65°C

Details:

Servo controlled bi-stable cartridge valve

Swivel limited 110°

Aerator M22x1

Materials in media contact:

Brass

Rubber, EPDM

Silicone based lubricant

PPSU

SS

PA

SPX Hose

Mounting:

M30x1,5 nut with locking pins o-ring and washer (See 94G0232)


Inlet / outlet connection:

Union Nut G1/2"

Aerator M22x1

Battery connection:

6V Lithium Battery

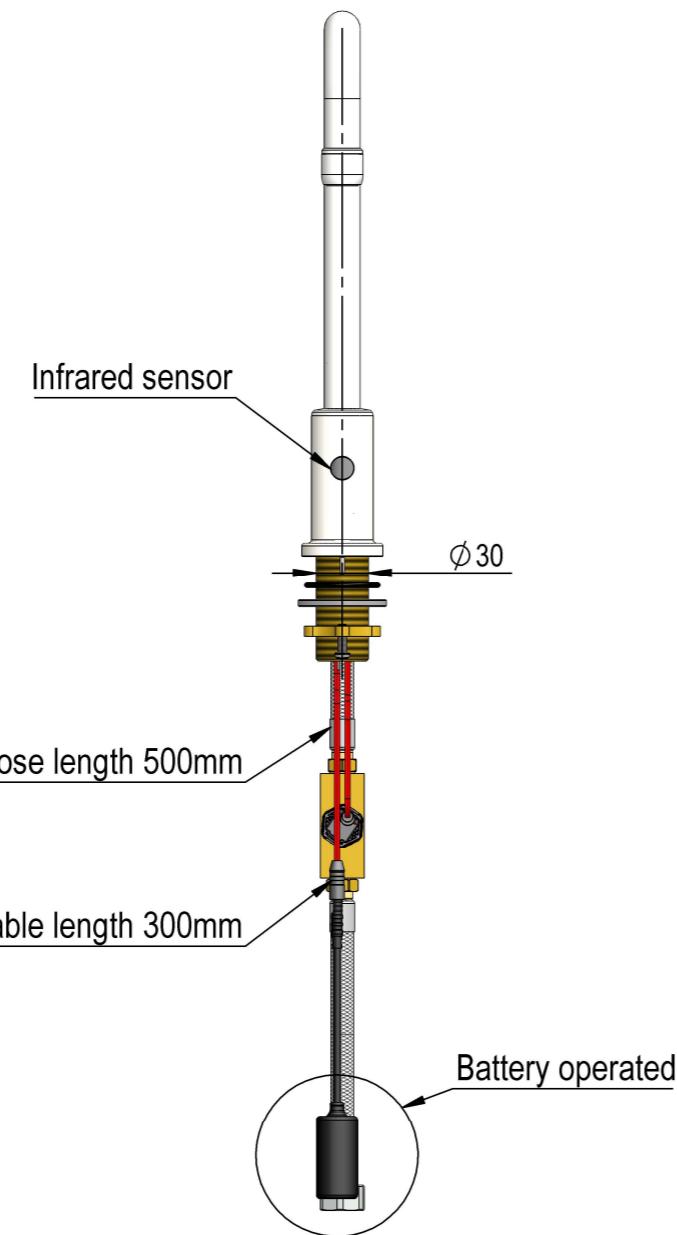

Description: 1-Valve, Table mounted, 1-Hole, Swivel limited 110°, M30x1,5mm								Media: Water
Comments:								
Drawing type: Customer drawing								Weight: 1.527 Kg
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by: REK	Drawn by: REK
							Released on TM No.	Date: 29-04-2019
Format: A3 Drawing No.: 26010081035-52E								

BROEN-LAB

This drawing is our property and
cannot be given to a third party,
copied or otherwise used without
our permission. BROEN-LAB A/S.